

Design and Implementation of Area Efficient Cellular Automata for Efficient Cryptography

G. Sai Shivani¹, B.Sanjana Yadav², K.Sravya³, K. Srinidhi Reddy⁴

¹Department of ECE, Bhoj Reddy Engineering College for Women, Hyderabad, India (UG Scholar)

²Department of ECE, Bhoj Reddy Engineering College for Women, Hyderabad, India (UG Scholar)

³Department of ECE, Bhoj Reddy Engineering College for Women, Hyderabad, India (UG Scholar)

⁴Department of ECE, Bhoj Reddy Engineering College for Women, Hyderabad, India (Assistant Professor)

ABSTRACT

A novel cryptographic algorithm mainly depends on the cellular automata. In order to get the randomness using cellular automata concept. In this algorithm we have mainly concentrated on cellular automata module we have 8 different rules for different rounds. In previous algorithm the message and key size was 128bit, but in this project to eliminate all the unnecessary logic operations present in conventional Cellular automata. A modified cellular automata is proposed to achieve less area optimization. The design entry is done in VHDL (VHSIC (Very High Speed Integrated Circuit)) Hardware Description Language (HDL) and simulated using ISIM Simulator. It is synthesized and implemented using Xilinx ISE 13.2tool.

Keywords: RCA, NRCA, bit permutation, RBP.

INTRODUCTION

Cryptography is the art and science of keeping messages secure. The basic objective of network security and cryptographic algorithms is to communicate securely over an insecure medium. The security to the data is provided by the cryptographic algorithms. The word cryptography has come from a Greek word, which means secret writing. The message to be sent through an unreliable medium is known as plaintext, which is encrypted before sending over the medium. The encrypted message is known as cipher text, which is received at the other end of the medium and decrypted to get back the original plaintext message. Cryptographic algorithm is a mathematical function used for encryption and decryption. Cryptographic algorithms are broadly classified into three types:- i.e. symmetric algorithm, asymmetric algorithm and authentication. As per the symmetric algorithm, same key is used for encryption and decryption. In asymmetric algorithm, different keys are used for encryption and decryption. Authentication algorithms mean that the receiver should be sure about sender's identity. The cellular automata (CA) have been used since the forties of last century. It was used in many physical applications. The applications of Cellular Automata extended to fields such as biological models, image processing, language recognition, simulation, Computer architecture, cryptography etc. The Cellular Automata is also one of the modern methods used to generate binary pseudo-random a Sequences using registers. The concept of CA was initiated by J. Von Neumann and Stan Ulam in the early 1940's. He devised a CA in which each cell has a state space of 29 states, and showed that the devised CA can execute any computable operation. He studied the 1 dimensional rules of Cellular Automata. However, due to its complexity, in the 1970, the mathematician John Conway proposed his now famous game of life which received widespread interest among researchers. His research was based on 2D Cellular Automata rules. Stephen Wolfram studied in much detail and showed that a family of simple one-dimensional cellular automata rules (now famous Wolfram rules) and are capable of emulating complex behavior. The main concern of this paper is secret key systems. In such systems the encryption key and the

**Address for correspondence:*

boinisanjana@gmail.com

decryption key are same (symmetric key). The encryption process is based on generation of pseudorandom bit sequences, and CAs can be effectively used for this purpose Cellular Automata (CA) is an organized lattice of cells and each cell have finite number of states, such as "TRUE" (T) or "FALSE" (F). The lattice dimensions can be of any finite value. Each cell within a collection of cells is called as hood. It is particular cell. To start with at time $t=0$, a state is assigned to the cells. The new states of the cell depend on its own previous state and states of its neighborhood. The new states are assigned based on some predefined rule using mathematical calculations.

Cellular Automata has following inherent Properties

- Parallelism means that the individual cell updates are performed independently of each other. That is, we think of all of the updates being done at once
- Homogeneity means that each cell is updated according to the same rules.

In this paper a new algorithm for encryption and decryption is introduced. Here, we have mostly concentrated on securing the key, by using the concept of cellular automata. In cellular automata, we have different rules based on each rule we generate the random key for each round. By using these keys, we are performing encryption and decryption operation. In encryption, we have xormodule, bit permutation, non reversible cellular automata. In decryption, we have xormodule, reverse bit permutation, non reversible cellular automata.

The structure of the paper is as follows: Section 1 describes introduction, Section 2 describes key generation, Section 3 describes encryption and Section 4 describes decryption, Section 5 describes simulation waveforms, Section 6 describes conclusion, Section 7 describes references.

KEY GENERATION

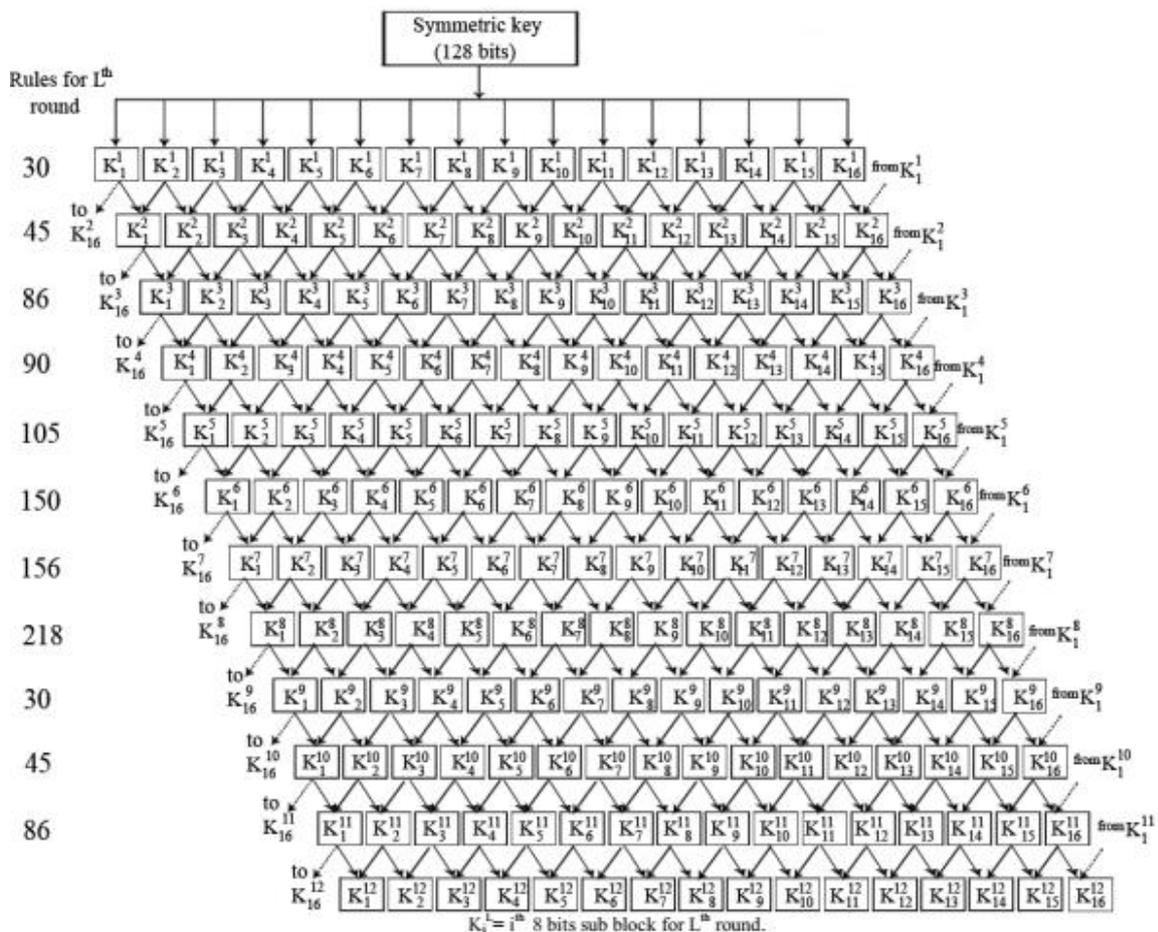


Fig1.

Each block is given to RCA module. First block is further divided into sixteen 8 bit blocks then given to rule 30 then we xor k1 with k16 to get the k16 of next block. Likewise k15 is xored with old k16 to get new k15 and so on. After completion of this operation we generate the random key for second round. As for first round the input key itself serves as the round key. In a similar manner, we apply rule 45,rule 86,rule 90,rule 105,rule 150,rule 165,rule 218,rule 30,rule 45, rule 86,rule 90,rule 105,rule 150,rule 165 for the further rounds. The same procedure follows for the second block as well.

ENCRYPTION

In encryption, we have two blocks i.e. Bit permutation, NRCA. For the first block, we are passing 128 bit plaintext and 128 bit key, and then the plaintext is further divided into sixteen 8 bit blocks. These blocks are clubbed such that we get 4 blocks of 32 bit. This serves as input to bit permutation block. In bit permutation the bits are arranged in different order based on the formula $(9 \cdot I \bmod 31) + 1$. The permuted output from bit permutation block is divided into sixteen 8 bit blocks and given to NRCA block along with input key. One of the inputs to the NRCA is the 8 bit input key. Each bit of this 8 bit input key is applied with one particular rule. Then the above output along with bit permutation output is xored. The same operation follows for 2nd block also. These operations are performed for 11 more rounds.

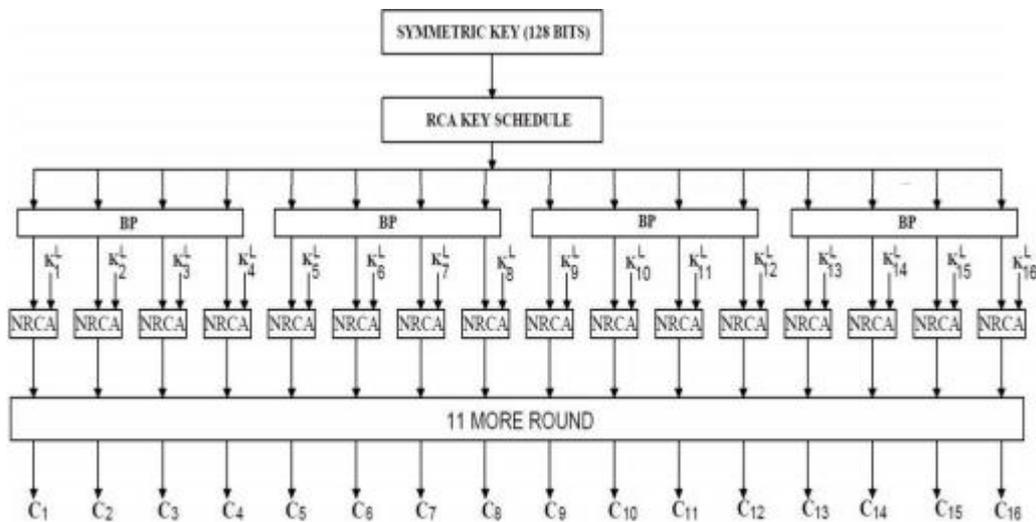


Fig2.

Bit Permutation

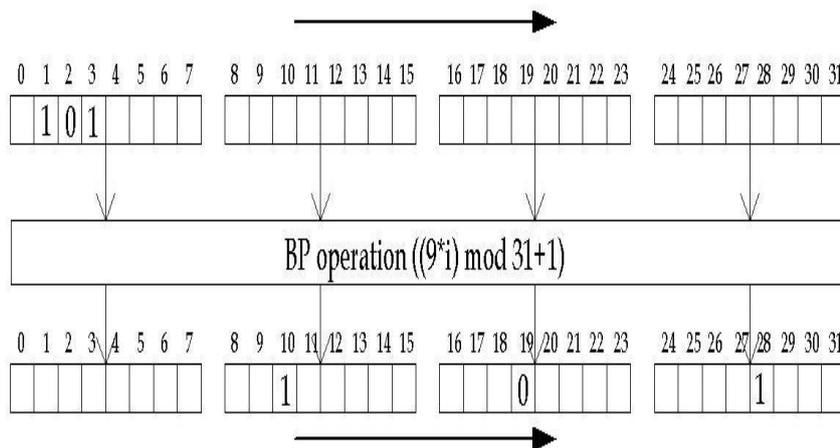


Fig3.

NRCA

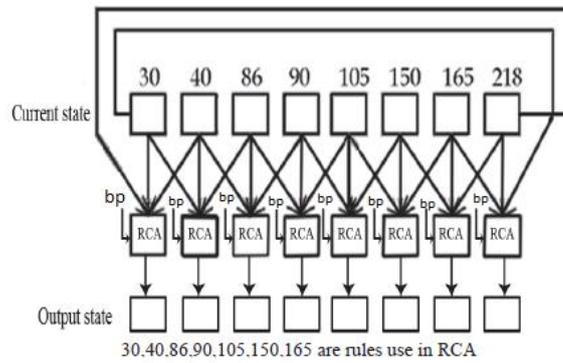


Fig4.

DECRYPTION

In decryption, we have two blocks i.e. Reverse bit permutation, NRCA. For the first block, we are passing 128 bit cipher text and 128 bit key, then the cipher text and key is further divided into sixteen 8 bit blocks. All these blocks of cipher text and key are given as input to NRCA block. This output is clubbed such that we get 4 blocks of 32 bit. This serves as input to reverse bit permutation block. In reverse bit permutation the bits are re organized into the original position. The output from Reverse bit permutation block is divided into sixteen 8 bit blocks the same operation follows for 2nd block also. These operations are performed for 11 more rounds.

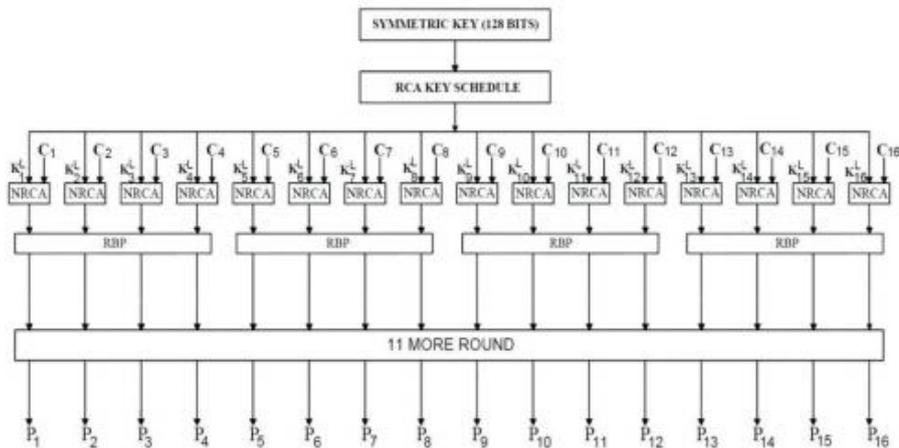


Fig5.

NRCA

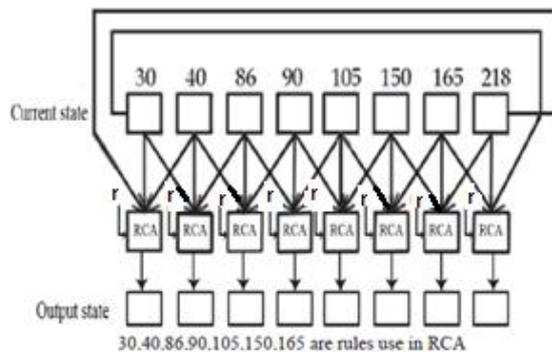


Fig6.

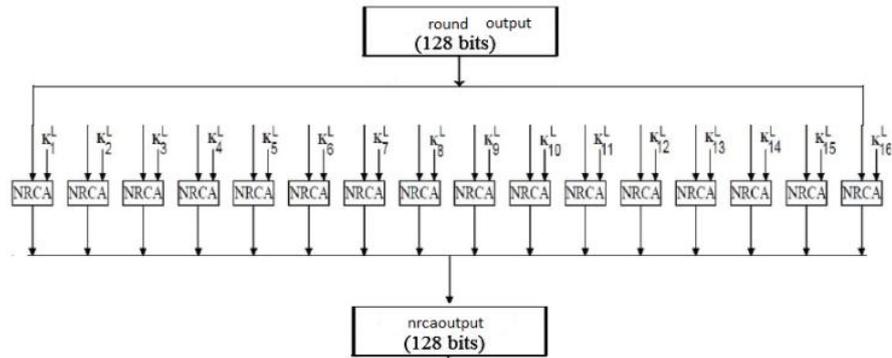


Fig7.

Reverse Bit Permutation


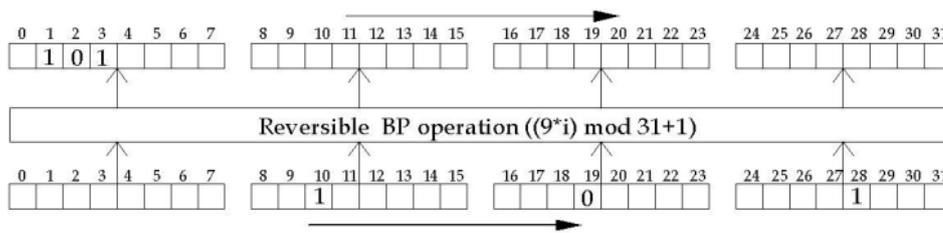



Fig8.

SIMULATION WAVEFORMS

Encryption

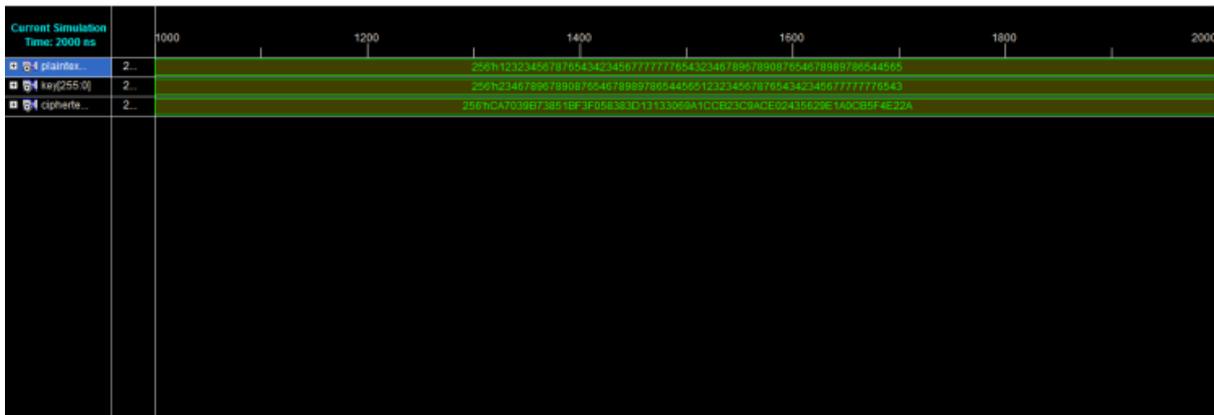

Decryption

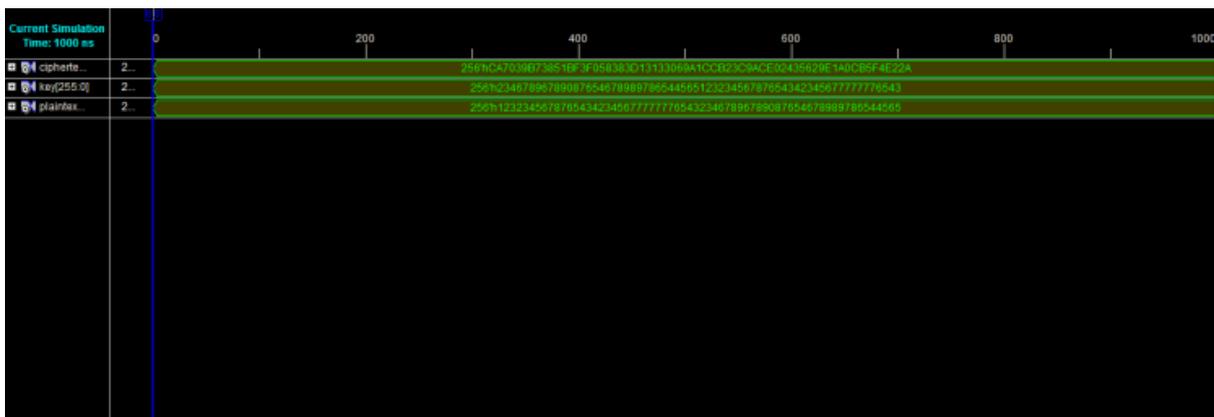

CONCLUSION

In this paper, to eliminate all the unnecessary logic operations present in conventional Cellular automata. A modified cellular automata is proposed to achieve less area optimization the proposed cellular automata encryption and decryption is designed and synthesized using vhdl codes in Xilinx ise 13.2i

REFERENCES

- [1] B.Schneier, “Applied Cryptography,” Wiley, New York, 1996.
- [2] S Tripathy and S Nandi, LCASE: “Lightweight Cellular Lightweight Cellular Automata-based Symmetric-key encryption.
- [3] Palash Sarkar, “A Brief History of Cellular automata,” Journal of ACM Computing Surveys (CSUR), Volume 32 Issue 1, March 2000.
- [4] S. Wolfram, “Cryptography with Cellular Automata,” Crypto ‘85, LNCS 218, pp. 429- 432, Springer-Verlag, 1986.
- [5] S. Wolfram, “Random sequence generation by cellular automata,” Advances in Applied Maths, vol. 7, No. 2, pp. 123-169, 1986.
- [6] Franciszek Sereczynski, Pascal Bouvry, and Albert Y. Zomaya. “Cellular automata Computations and secret key cryptography,” Parallel Computing Journal, 30(5-6):753–766, 2004. F. Standaert, G. Piret, G. Rouvroy, J. Quisquater, and J. Legat, “ICEBERG: An involutonal cipher efficient for block encryption in reconfigurable hard- ware,” FSE ‘04, LNCS 3017, pp. 279-299, Springer-Verlag, 2004.
- [7] N. Sklavos, N. A. Moldovyan, and O. Koufopavlou, “High speed networking: Design and implementation of two new DDP-based ciphers, Mobile Networks and Applications-MONET,” Vol. 25, No. 1-2, pp. 219-231, Springer-Verlag, 2005.
- [8] N. A. Moldovyan, P. A. Moldovyan, and D.H. Sum- merville, “On software implementation of fast DDP- based ciphers,” International Journal of Network Security, Vol. 4, No. 1, pp. 81-89, 2007.
- [9] T. Toffoli and N. Margolus, “Invertible cellular automata: A review,” Physica D, vol. 45, pp. 229-253, (reprinted with correction as of Oct. 2001).

AUTHORS' BIOGRAPHY



G. Sai Shivani, is pursuing her B.Tech in Electronics and Communication Engineering from Bhoj Reddy Engineering College for Women. Presented a poster on "Voice Morphing" at “BRECW” in March 2015 and was awarded first prize. Awarded merit certificate for excellent academic performance in her B-tech first year. Attended a workshop conducted by Technophilia Systems on “Hand Gesture Controlled Six Legged Walking Robot”, in association with Robotics and Computer Application Institute of USA held at Indian Institute of Technology Bombay, on 28 March 2015. Attended workshops conducted by Srastra Technologies on “Embedded Systems” at BRECW in July 2015. Attended a workshop conducted by Prayog labs on "PCB Workshop" at BRECW in February 2014



B. Sanjana Yadav, is pursuing her B.Tech in Electronics and Communication Engineering from Bhoj Reddy Engineering College for Women. Awarded two merit certificates for excellent academic performance in her B-tech first year and final year. Attended workshops conducted by Srastra Technologies on “Embedded Systems” at BRECW in July 2015. Attended a workshop conducted by Prayog labs on "PCB Workshop" at BRECW in February 2014.

Attended many workshops and conferences related to VLSI and Low power VLSI. His research interest is VLSI Technology and Design, communication systems and antennas



K. Sravya, is pursuing her B.Tech in Electronics and Communication Engineering from Bhoj Reddy Engineering College for Women. Attended workshops conducted by Srastra Technologies on “Embedded Systems” at BRECW in July 2015. Attended a workshop conducted by Prayog labs on "PCB Workshop" at BRECW in February 2014.



K. Srinidhi Reddy, is an assistant professor at Bhoj Reddy Engineering College for Women, Hyderabad in ECE Department. She received her B.Tech degree in ece from Satyam learning campus SLC'S institute of technology and sciences, Hyderabad and M.Tech degree in VLSI design from VIGNAN'S university at Vadlamudi, Guntur. Her research interest in VLSI technology and design and communication system